

SPECIFICATION SHEET

PRODUCT # PR803-AB

Housing: Heavy duty solid brass shroud. Body design provides enclosed, water resistant function to protect lamp inside.

Lens: Heat resistant Convex Glass Lens is fully sealed with silicon sealant reduces water build-up and puddle on the lens.

Socket: High Temperature ceramic socket with nickel contacts, Stainless Steel spring

Lamp: LED G4 Lamp type, Max wattage 50W.

Gasket: A thick rubber gasket.

Wiring: 3' #18/2 Direct bury landscape lighting wire with UL listed, Pre-stripped hub-ready leads for quick installation.


Mounting: In-ground ABS Stake

Electrical Notes: A remote 12V transformer required, may be ordered to Elram, Inc. separately. Voltage range for 12V halogen lamps are 11V-12.5V. Voltage range for LED lamps are 9V-17V

Hardware: Hexagonal crew fix to part

Warranty: Limited lifetime Warranty

PR803			
SERIES	FINISH	VOLTAGE	LAMP
PR803 - Brass Mushroom	AB Antique Brass	(Blank) 12V DC	L - LED LAMP

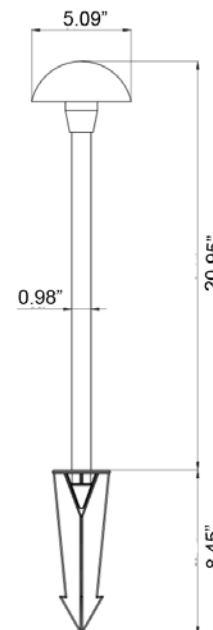

ACCESSORIES

In-Ground ABS Stake

