Oak Landscape Lighting

CATALOG #			
PROJECT NAME		TYPE	

GR579-AB

SPECIFICATION SHEET

Housing:
Die-casting brass Knucle with adjustable thumb screw.
Easy adjustable for vertical tilt and horizontal rotation.

Lens:
Heat Resistant Glass Lens is full sealed
with silicon sealant reduces water build-up and
puddle on the lens

Socket:
High temperature ceramic socket with nickel contacts,
Stainless steel spring

Lamp:
LED G4 Lamp type, Max wattage 35W.

Gasket:
A thick rubber gasket.

Dimensions:
6.25"length×3"Face Height×4.25"Face Width

Wiring:
3' #18/2 Direct bury landscape lighting wire
with UL listed
Pre-stripped hub-ready leads for quick installation.

Mounting
In-ground ABS Stake or Surface/Tree Mounting.

Electrical Notes:
A remote 12V transformer required,
may be ordered to Elram, Inc separately.
Voltage range for 12V halogen lamps are 11V-12.5V.
Voltage range for LED lamps are 9V-17V.

Hardware:
Hevagonal screw fix two part

Warranty:
Lifetime warranty on fixture housing.

GR579			
SERIES	**FINISH**	**VOLTAGE**	**LAMP**
GR579 ABS Stake **TR579** Surface/Tree	**AB** **Bronze**	**Blank** 12V DC	**G4** LED Lamp

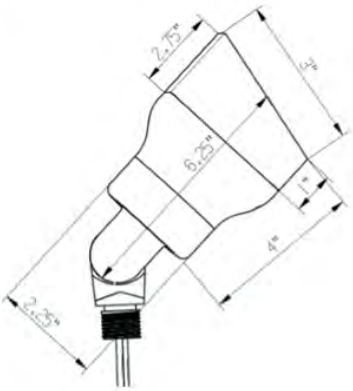

ACCESSORIES

In-ground ABS Stake

Surface Tree/Mounting

© 2015 ELRAM, Inc. Elram, Inc. holds the right to change the design of our products at any time.