Oak Landscape Lighting

CATALOG #			
PROJECT NAME		TYPE	

SPECIFICATION SHEET

PRODUCT # GR505-BK Classic Lighthouse

Housing: Die-cast aluminum knuckle and adjustable thumb screw. Easy adjustable for vertical tilt and horizontal rotation.

Lens: Heat resistant Convex Glass Lens is fully sealed with silicon sealant reduces water build-up and puddle on the lens. Flat Tempered Glass.

Socket: High Temperature ceramic socket with nickel contacts, Stainless Steel spring.

Lamp: MR16 Lamp type, 12V Max wattage 50W.

Gasket: A thick rubber gasket.

Wiring: 3' #18/2 Direct bury landscape lighting wire with UL listed, Pre-stripped hub-ready leads for quick installation.

Mounting: In-ground ABS Stake or Surface/Tree Mounting.

Electrical Notes: A remote 12V transformer required, may be ordered to Elram, Inc. separately. Voltage range for 12V halogen lamps are 11V-12.5V. Voltage range for LED lamps are 9V-17V.

Hardware: Hexagonal crew fix to part.

Warranty: One (1) year warranty against housing and body defects.

MOUNT	LIGHT ENGINE	SERIES	COLOR TEMP	FINISH	LUMEN	BEAM °
GR		**505**				
GR - Ground Stake **TR -** Tree Mount	**blank** No Lamp **L** LED Lamp **D** Not Available	Classic Lighthouse	**WW** 2700K **3K** 3000K **4K** 4000K **5K** 5000K	**BK** Black	**05** 500lm **06** 650lm **07** 550lm **10** 750lm	**SP** 20° **blank** 36°

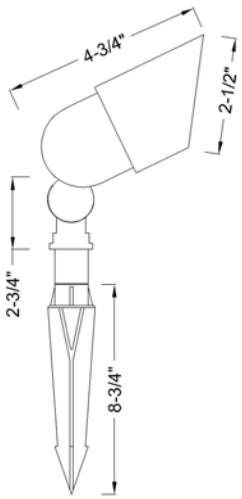

© 2015 ELRAM, Inc. Elram, Inc. holds the right to change the design of our products at any time.