

## SPECIFICATION SHEET

### PRODUCT # GR529-BZ

**Housing:** Die-cast aluminum Knuckle with adjustable thumb screw. Easy adjustable for vertical tilt and horizontal rotation.

**Lens:** Heat resistant Convex Glass Lens is fully sealed with silicon sealant reduces water build-up and puddle on the lens. Flat Tempered Glass.

**Socket:** High Temperature ceramic socket with nickel contacts, Stainless Steel spring

**Lamp:** LED MR16 Lamp type, Max wattage 50W.

**Gasket:** High temperature silicone O-ring for water tight seal.

**Wiring:** 3' #18/2 Direct bury landscape lighting wire with UL listed, Pre-stripped hub-ready leads for quick installation.


**Mounting:** In-ground ABS Stake or Surface/Tree Mounting.

**Electrical Notes:** A remote 12V transformer required, may be ordered to Elram, Inc. separately. Voltage range for 12V halogen lamps are 11V-12.5V. Voltage range for LED lamps are 9V-17V.

**Hardware:** Hexagonal crew fix to part

**Warranty:** One (1) year warranty against housing and body defects.

GR529			
SERIES	FINISH	VOLTAGE	LAMP
GR529 - Bullet Fixture TR529 - Surface / Tree	BZ Bronze	12V DC	

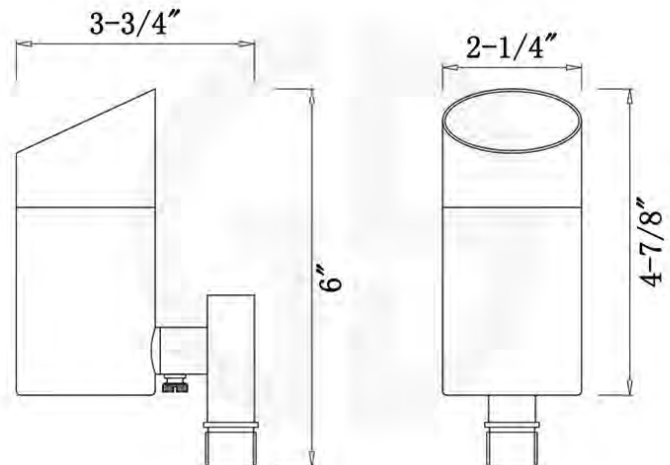

### ACCESSORIES

In-Ground ABS Stake



Surface / Tree Mounting

