


SPECIFICATION SHEET

PRODUCT # GW301-SS In-ground W/ Sleeve

- Housing:** 316 Marine Grade Stainless Steel fixture mounted with stainless steel retention clips inside PVC sleeve
- Wiring:** 3' #18/2 Direct bury wire with UL listed, Stripped hub-ready leads for quick installation. Silicone filled direct burial wire nut (**AX203**) is available from Elram, Inc.
- Lens:** Heat resistant Convex Glass Lens is fully sealed with silicon sealant reduces water build-up and puddle on the lens. Flat Tempered Glass.
- Mounting:** In-ground direct burial or PVC sleeve concrete encasement.
- Socket:** High Temperature ceramic fixed socket with nickel contacts, stainless steel spring.
- Electrical Notes:** A remote 12V transformer, required, may be ordered from Elram, Inc. separately. The voltage range for 12V halogen lamps are 11V-12.5V. Voltage range for LED lamps are 9V-17V.
- Lamp:** LED MR16 50W.
- Hardware:** Hexagonal screw fix to part.
- Gasket:** A thick rubber gasket.
- Warranty:** Limited lifetime Warranty.



Drive-Over Rated for 1101 lb

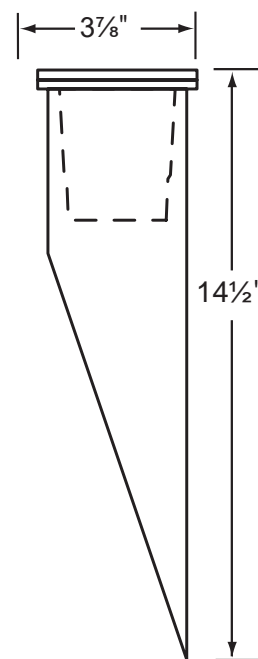

ORDERING INFORMATION

Sample Part Number: **GW301-SS-L2000**

MOUNT	LIGHT ENGINE	SERIES	FINISH	LAMP	AVAILABLE WATERPROOF LED MR16 LAMPS						
					LAMP #	BEAM °	CCT	Wattage	Equivalent	Lumen	Rated Hours
GW - In-ground	blank - LED MR16	301 - In-Ground W/ Sleeve	SS - Stainless Steel	L2000 - 7W LED MR16 2700K	L1900	15°	27	4W	20W Halogen	300lm	50,000
					L1901	15°	3K	4W	20W Halogen	300lm	50,000
					L1902	15°	4K	4W	20W Halogen	300lm	50,000
					L1910	45°	27	4W	20W Halogen	300lm	50,000
					L1911	45°	3K	4W	20W Halogen	300lm	50,000
					L1912	45°	4K	4W	20W Halogen	300lm	50,000
					L1915	60°	27	4W	20W Halogen	300lm	50,000
					L1916	60°	3K	4W	20W Halogen	300lm	50,000
					L1917	60°	4K	4W	20W Halogen	300lm	50,000
					L1990	15°	27	7W	50W Halogen	520lm	50,000
					L1991	15°	3K	7W	50W Halogen	520lm	50,000
					L1992	15°	4K	7W	50W Halogen	520lm	50,000
					L2000	45°	27	7W	50W Halogen	520lm	50,000
					L2001	45°	3K	7W	50W Halogen	520lm	50,000
					L2002	45°	4K	7W	50W Halogen	520lm	50,000
					L2005	60°	27	7W	50W Halogen	520lm	50,000
					L2006	60°	3K	7W	50W Halogen	520lm	50,000
L2007	60°	4K	7W	50W Halogen	520lm	50,000					