

## SPECIFICATION SHEET

### PRODUCT # GR526-BK Aluminum Smooth Bullet

**Housing:** Die-cast aluminum Knuckle with adjustable thumb screw. Easy adjustable for vertical tilt and horizontal rotation.

**Lens:** Heat resistant Convex Glass Lens is fully sealed with silicon sealant reduces water build-up and puddle on the lens. Flat Tempered Glass.

**Socket:** High Temperature ceramic socket with nickel contacts, Stainless Steel spring

**Lamp:** LED MR16 Lamp type, Max wattage 50W.

**Gasket:** High temperature silicone O-ring for water tight seal.


**Wiring:** 3' #18/2 Direct bury landscape lighting wire with UL listed, Pre-stripped hub-ready leads for quick installation.

**Mounting:** In-ground ABS Stake or Surface/Tree Mounting.

**Electrical Notes:** A remote 12V transformer required, may be ordered to Elram, Inc. separately. Voltage range for 12V halogen lamps are 11V-12.5V. Voltage range for LED lamps are 9V-17V.

**Hardware:** Hexagonal crew fix to part

**Warranty:** One (1) year warranty against housing and body defects.

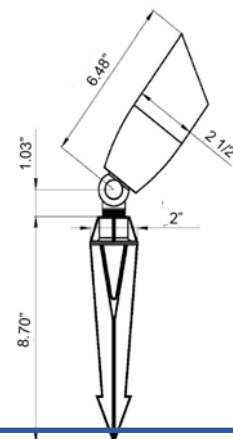

## ORDERING INFORMATION

Sample Part Number: GR526-BK-L2000

MOUNT	LIGHT ENGINE	SERIES	FINISH	LAMP	AVAILABLE WATERPROOF LED MR16 LAMPS								
					LAMP #	BEAM °	CCT	Wattage	Equivalent	Lumen	Rated Hours		
GR - In-ground ABS Stake	blank - LED MR16	526 - Aluminum Smooth Bullet	BK -Black	L2000 - 7W LED MR16 2700K	L1900	15°	27	4W	20W Halogen	300lm	50,000		
					L1901	15°	3K	4W	20W Halogen	300lm	50,000		
					L1902	15°	4K	4W	20W Halogen	300lm	50,000		
					L1910	45°	27	4W	20W Halogen	300lm	50,000		
					L1911	45°	3K	4W	20W Halogen	300lm	50,000		
					L1912	45°	4K	4W	20W Halogen	300lm	50,000		
					L1915	60°	27	4W	20W Halogen	300lm	50,000		
					L1916	60°	3K	4W	20W Halogen	300lm	50,000		
					L1917	60°	4K	4W	20W Halogen	300lm	50,000		
					L1990	15°	27	7W	50W Halogen	520lm	50,000		
					L1991	15°	3K	7W	50W Halogen	520lm	50,000		
					L1992	15°	4K	7W	50W Halogen	520lm	50,000		
					L2000	45°	27	7W	50W Halogen	520lm	50,000		
					L2001	45°	3K	7W	50W Halogen	520lm	50,000		
					L2002	45°	4K	7W	50W Halogen	520lm	50,000		
TR - Surface Tree mount			BZ -Bronze		L2005	60°	27	7W	50W Halogen	520lm	50,000		
					L2006	60°	3K	7W	50W Halogen	520lm	50,000		
					L2007	60°	4K	7W	50W Halogen	520lm	50,000		
					BE -Beach								
						GN -Green							
							VG -Verde Green						
								WH -White					

## ACCESSORIES

In-Ground ABS Stake



All Oak Landscape Lighting LED lamps have a 5 year limited warranty against manufacturers defect.

When ordering LED lamp with fixture Incorporate Lumen Output, CCT, and Beam° or just Lamp # Into the part number from the lamp Chart above

Surface or Tree Mount

